




GALATE N&B
CAMERA INSPECTION
B & WTV CAMERA INSPECTION

- **SUIVI DE PROCESS // CONTROL PROCESS**
- **MAINTENANCE // MAINTENANCE**
- **REPERAGE // SPOTTING**
- **GUIDAGE // GUIDING**

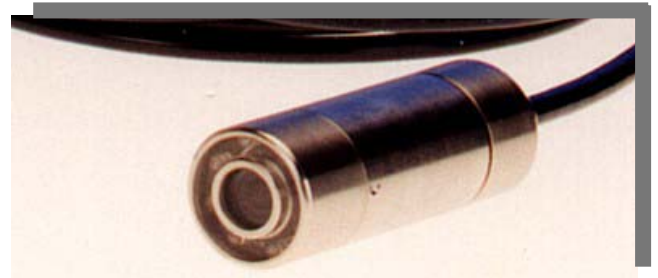

*Utilisation en eau & en air //
Très faible encombrement //
Eclairage annulaire variable à Leds
//
Water and air operating
Small size
Adjustable ring lighting*



GALATE N&B

CAMERA INSPECTION

B & WTV CAMERA INSPECTION

DESIGNATION	TC	MTE	GAL RAD	GAL RAD ROT
Camera	N& B // B&W			
<i>Capteur //Sensor</i>	<i>1/4" CCIR ou EIA</i>			
Résolution//Resolution	380 lignes TV:// TV lines			
Rap S/B Ratio Signal /Noise	> 46 dB			
Sensibilité//Sensitivity	0.8 lux			
Visée // View	Axiale// Axial		Radiale// Latéral	
Objectif//Lens	Focale//Focal 3.8 mm (H52°V41°)		Focale//Focal 6 mm (H34°V26°)	
Mise au point // Mod	Manuelle//Manual		Télécommandée //Remoted	
Rotation motorisation//	Non //No			360° continu avec
Rotation axis				recopie//Endless with OSD
Eclairage //Lighting	Infrarouge// Infrared		Leds blanches // White leds	
Electronique // Electronic	Multiconducteurs// Multiwires			Multiplexée// Multiplex
Connectique //Connector	Sortie Presse Etoupe // Cable Gland			FISCHER
Longueur de câble de sortie/	4 m	30 m		Câble coaxial//
Cable Length after Gland				Coaxial cable
Etanchéité // Depth using	AIR	3 Bars		
Matière//Material	Inox 304 L // Stainless steel 304L			
Dimensions /Poids//	Ø 28 , L 73 (mm) 0.3 Kg	Ø 28 ,L 130 (mm) 0.35 Kg	Ø 28 , L 188 (mm) 0.45Kg	Ø 38 , L 316 (mm) 1.15 Kg
Dimensions/Weight				

